



8 a.m. - 5 p.m. Sales Available
International: 1-919-443-0207
Toll Free: 1-888-551-3082



Visit Our Website
www.wakeindustrial.com



Email Us
sales@wakeindustrial.com

All Products from Wake Industrial, LLC, come with:

Sales and Repairs

We specialize in providing immediate product delivery when your system goes down. We have thousands of In-Stock automation products and offer a full range of repair options.

Fast Shipping

We ship worldwide, offering any type of shipping method with all the major logistic companies such as FedEx, UPS, DHL, USPS, and a variety of freight carriers.

Quality Guarantee

With standards like our 1 year warranty on ALL products, we can guarantee a better customer service experience than any other company within our industry.

Damage Free Delivery



All of our products are cleaned, go through quality control and are shipped using a custom military grade foam to ensure your product arrives undamaged. We have the capability to ship both small 1lb products and large 200lb+ automation parts regardless of your location.

Stay In Touch

Wake Industrial, LLC
1620 Old Apex Road
Cary, NC 27513


Wake Industrial is not affiliated with nor an authorized distributor or representative of any manufacturers, brands or products listed.

Call: 1-888-551-3082
International: 1-919-443-0207
Fax: 1-919-267-1705

Email: sales@wakeindustrial.com
Website: www.wakeindustrial.com

Accessories

Uninterruptible power supply IndraControl VAU

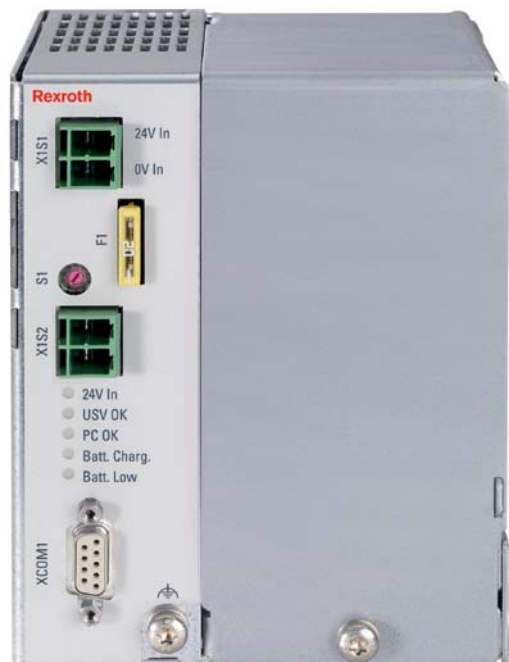

Accessories

Uninterruptible power supply ■ IndraControl VAU**Documentation**

- Uninterruptible power supply DC 24 V, 240 W with USB interface for IndraControl VP* devices

Technical data

Electrical data	
Current consumption at nominal voltage	Max. 12 A (2 A for charging the battery)
Interference and surge immunity	$U_{Max} = 35 \text{ V}$ (for $t = 100 \text{ ms}$)
Inputs	
Nominal input voltage U_{INenn}	24 V DC
Permissible nominal input voltage range	24 V DC (-15 ... +20%)
Input fuse	None
Switch-on threshold	22 V \pm 5 %
Switch-off threshold	19 V \pm 5 %
Max. power consumption	288 W (of which 48 W are for charging the battery)
Protective circuit inputs	Reverse polarity protection
Outputs	
Nominal output voltage U_{Out}	24 V DC
Output voltage range	24 V DC (-15 ... +20%)
Current output at U_{nom}	Max. 10 A
Switchover time	< 1 ms
Override time	Max. 3 minutes
Max. output rating	240 W
Short circuit resistance	No
Max. capacitive load	5600 μF

Dimensions

Dimensions		
Height H	[mm]	158.6
Width B	[mm]	120
Length T	[mm]	132.7

Accessories

Uninterruptible power supply ■ IndraControl VAU

Ordering information

Type code	Description	Material number:
VAU01.1U-024-024-240-NN	Uninterruptible power supply DC 24 V, 240 W with USB interface for IndraControl VP* devices	R911171024

Documentation

Type code	Description	Material number:
DOK-SUPPL*-VAU*01.1X**-IT02-DE-P	Operating instructions for Rexroth IndraControl VAU 01.1 (DE)	R911336866
DOK-SUPPL*-VAU*01.1X**-IT02-EN-P	Operating instructions for Rexroth IndraControl VAU 01.1 (EN)	R911336867

Bosch Rexroth AG

Postfach 13 57
97803 Lohr, Germany
Bgm.-Dr.-Nebel-Str. 2
97816 Lohr, Germany
Tel. +49 9352 18-0
Fax +49 9352 18-8400
www.boschrexroth.com/electrics

Local contact information can be found at:

www.boschrexroth.com/adressen

The data specified above only serve to describe the product. As our products are constantly being further developed, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification.

It must be remembered that our products are subject to a natural process of wear and aging.